

# ECOTANK+ 1.2 / 2.5

Centrifugal tank pump for the removal of condensates from air conditioners, refrigerated displays or gas condensing boilers.

Ref ECOTANK+ 1.2 50Hz: DE12QCC610  
Ref ECOTANK+ 2.5 50Hz: DE25QCC620  
Ref ECOTANK+ 2.5 60Hz: DE25QCD140

**siccom**  
INNOVATIVE VISION



pH > 2.5



**pH > 2.5**




## Specifications

|                                | 50Hz version       | 60Hz version     |
|--------------------------------|--------------------|------------------|
| Flowrate max                   | 300 l/h            | 400 l/h          |
| Discharge head max             | 4.6 m              | 6 m              |
| pH tolerated                   | pH > 2.5           | pH > 2.5         |
| Max temperature of condensates | 40°C               | 40°C             |
| Electrical power               | 65W                | 65W              |
| Voltage                        | 230V <b>50Hz</b>   | 230V <b>60Hz</b> |
| Alarm                          | NO-NC 3A           | NO-NC 3A         |
| Noise level                    | N/C                | N/C              |
| Protection rating              | IP24               | IP24             |
| Thermal protection             | Yes                | Yes              |
| Operating cycle*               | 30%                | 30%              |
| Power cable lenght             | 1.5 m              | 1.5 m            |
| Dimensions ECOTANK+ 1.2        | 280 x 130 x 129 mm |                  |
| ECOTANK+ 2.5                   | 280 x 130 x 159 mm |                  |

\* The pump is able to run 30% of the time if necessary. (ex 3s ON / 7s OFF)

## Flowrate

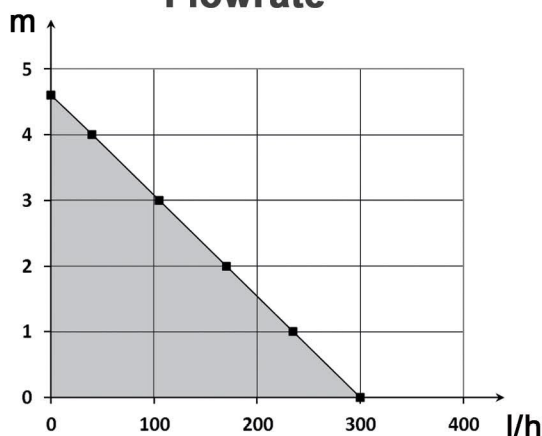

## Benefits

### IP24 protection

The pump is protected against water projections.



### Universal electric plug

Power/alarm cable can be taken off, making easy installation and maintenance.



### Outlet for 6/9 or 9/12 mm tube

Thanks to its connector supplied, the discharge can be made with a 6/9mm or a 9/12mm tube.



### High capacity tank

Thanks to its 2.5 l tank, the ECOTANK+ 2.5 reduces the number of pumping cycles and answers to a great deal of applications.



### Compact tank pump

With only 129mm height, the ECOTANK+ 1.2 fits easily in any space.



### Reversible tank

Turning the tank allows to fit in any configuration.



### PVC clear tube included (only in 60Hz version)

A 6m discharge tube (10x13mm diameter) is included in the ECOTANK+ 2.5 60Hz version.



## Pack contents

Pump - Cable power / alarm - 6/9mm outlet adaptor - Screws and rawlplugs - PVC clear tube 6m (only in 60Hz version)

